




INNOVATION. **PRECISION.** EXCELLENCE.

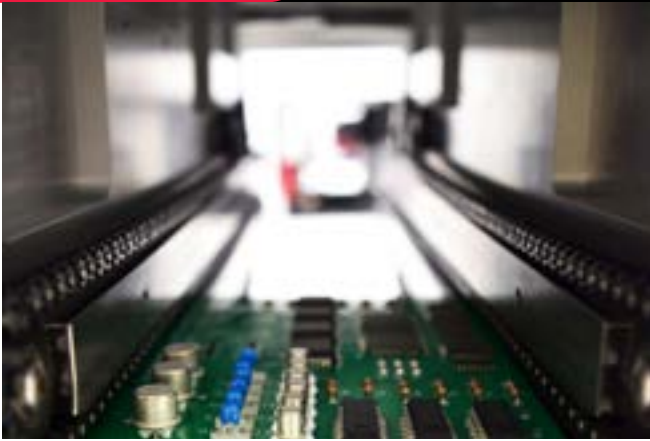

System Specifications

Maximum Pallet Weight

10 lbs
4.5 kg

Conveyor Speed

0.15 m/min to 24 m/min
0.5 ft/min to 80 ft/min

Working Width

50 to 500 mm

Maximum Pallet Length

550mm

Component Clearance

100 mm (4 in) top and bottom
4.75 mm (0.187 in) in edge carrying (SMEMA)

Conveyor Height

890 to 965 mm

Power Requirements

100V - 240V, 50/60Hz

Certification

CE



BI2000

Board Inverter Module

The BI2000 is a compact inverting module for use with printed circuit boards and pallets within an inline process. While configured in a PVA production line, the BI2000 exposes the underside of an assembly for processing. Once inverted, the assembly can continue on to the next module, or return to the original workstation in a bi-directional mode.

The BI2000 has many integrated features including:

- Edge chain conveyor with adjustable tension guides
- Bi-directional conveyor travel
- Pneumatic inverting mechanism
- SMEMA communications interface
- Four-inch top and bottom side component clearance
- Unitronics PLC/HMI
- OIT touch screen interface
- Standard hand crank conveyor adjust and optional automatic conveyor adjust
- Optional inlet and exit shutters

For more information, please contact PVA at info@pva.net or contact your local representative.

Headquarters
6 Corporate Drive | Halfmoon, NY 12065
tel +1 518 371 2684 | fx +1 518 371 2688
www.pva.net | info@pva.net

